



Fiber Optic Assemblies -Adapters



	Zirconia
Insertion Loss (typical)	0.1dB
Mating durability	500
Reception retention force	1N-2.5N
Operating temperature	neg 25 to 70, 12 cycles

Product Facts
Available in FC, SC, ST, LC, MTRJ, E2000 and MTP /MPO
Available in Simplex, Duplex, Quad and hybrid
Low Insertion loss
Rohs, REACH Compliant
High quality Plastic / metal die cast casing



N3001A	ST Adapter Singlemode
N3001B	ST Adapter Multimode

N3002B	FC Square Flanged
N3002C	D Flanged
N3002D	R Flanged

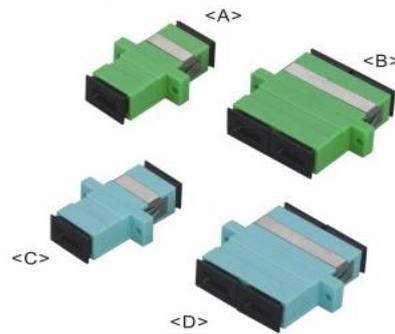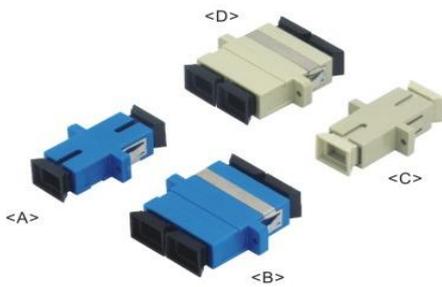


N3004A	SC Simplex Singlemode
N3004B	SC Duplex Singlemode
N3004C	SC Simplex Multimode
N3004D	SC Duplex Multimode


N3100A	SC Simplex Singlemode APC
N3100B	SC Duplex Singlemode APC
N3100C	SC Simplex Multimode OM3
N3100D	SC Duplex Multimode OM3



Fiber Optic Assemblies -Adapters

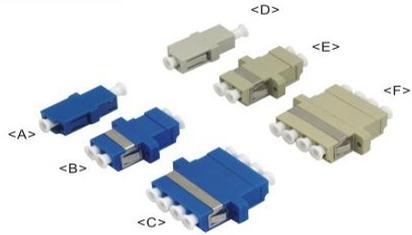

N3005A	LC Simplex Singlemode
N3005B	LC Duplex Singlemode
N3005C	LC Quad Singlemode
N3005D	LC Simplex Multimode
N3005E	LC Duplex Multimode
N3005F	LC Quad Multimode

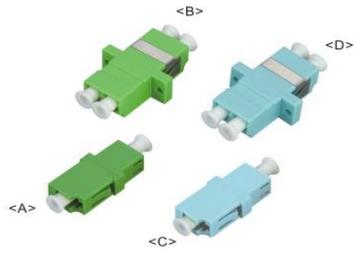

N3101A	LC Simplex Singlemode APC
N3101B	LC Duplex Singlemode APC
N3101C	LC Simplex OM3
N3101D	LC Duplex OM3



N3000A	STFC Hybrid Adapter
N3000B	SCFC Hybrid Adapter
N3000C	STSC Hybrid Adapter



N3267	MPO adapter (Female to Male)
-------	------------------------------