

TAMP-5520 5-Input Power Amplifier

Technical Specification


| Model | | TAM-5520 | |
|--|-----------------------|----------------|--|
| Frequency | Satellite (Mhz) | 950 - 2150 | |
| | Terrestrial (Mhz) | 47-790 | |
| Input | | 4 Sat.+1 Terr. | |
| Output | | 4 Sat.+1 Terr. | |
| Gain | Tap Sat. (dB) | 22±2 | |
| | Tap Terr. (dB) | 17±2 | |
| Gain Control | Sat (dB) | 10±2 | |
| | Terr (dB) | 10±2 | |
| Slope Control | Terr (dB) | 10±2 | |
| Slope Fixed | Sat (dB) | 6±1.5 | |
| Maximum Output Level | Sat.(IMA3-35dB) (dB) | 110dBuV | |
| | Terr.(IMA3-60dB) (dB) | 110dBuV | |
| Trunk Max Current Pass (per line) (dB) | | 2 | |
| TERR 12V DC Supply (switchable) (dB) | | 100 | |
| Current Consumption (mA) | | 180 | |
| Dimension (mm) | | 164x136x41 | |
| Weight (g) | | 365 | |

Features

- 4 SAT+ 1 Terr
- Plastic bracket for quick and easy installation
- Standard colour coding for easy installation
- Optimised energy consumption
- Full HD compliant



Application

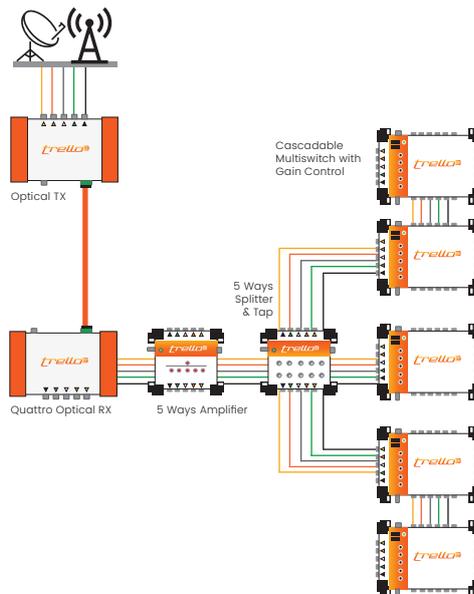

Ordering Information

5 Input Power Amplifier
Order Number: TAMP-5520

Other Related Product
Standalone 5 Input Multiswitches
(8, 12, 16, 24, 32 Channels)
Order Number: TMS-50xxS

Cascadable 5 Input Multiswitches Gain Control
(8, 12, 16, 24, 32 Channels)
Order Number: TMS-55xxGC

5 Input Multiswitches Splitter & tap
Order Number: TSP510-10T

5 Input Fiber Optic Transmitter
Order Number: TFO-2500CW-TX

Fiber Optic Quattro Receiver
Order Number: TFO-2500CW-QTRX